

- LOG antene – UHF
- LOG antene – UHF



P-2845




P-5045

Type Tip Tip	Channels (frequency) Kanali (frekvencija) Kanali (frekvencija)	No. of elements Število elementov Broj elemenata	Gain Dobitek Dobitak	F / B ratio Razmerje napr. – naz. Odnos napr. - naz.	Beam width Širina glav. lista Širina glav. latice	Connection Priključek Priključak	Imped. Imped. Imped.	Lenght Dolžina antene Dužina antene	Packing Pakiranje Pakovanje		
									pcs. kom kom	cm cm cm	m ³ m ³ m ³
P-2845 P-2845 F *	Ch. 21 – 69 (470 – 862 MHz)	28	9,5 dB(i)	24 dB	Hor. 35 – 45° Vert. 55 – 46°	–	75 Ohm	106 cm	1	106 x 34,5 x 5,5 111 x 34 x 16 111 x 34 x 27	0,020
P-2845 DTT/G **			»F«			5			0,060		
P-2845 N P-2845 NF *	Ch. 21 – 69 (470 – 862 MHz)	28	10 dB(i)	27 dB	Hor. 30 – 40° Vert. 52 – 43°	–	75 Ohm	114 cm	10	121 x 34 x 27	0,111
P-2845 N DTT/G **			»F«			10			0,111		
P-3405 P-3405 F *	Ch. 38 – 69 (606 – 862 MHz)	34	12 dB(i)	> 27 dB	Hor. 44° Vert. 46°	–	75 Ohm	127 cm	15	144 x 33,5 x 30	0,145
P-3405 DTT/G **			»F«			15			0,145		
P-5045 P-5045 F *	Ch. 21 – 69 (470 – 862 MHz)	50	12 – 12,5 dB(i)	26 dB	Hor. 26° Vert. 42°	–	75 Ohm	205 cm	2	206 x 33 x 9 111 x 34 x 27	0,061
P-5045 DTT/G **			»F«			5			0,102		

* passive antenna with different connections (see page 6)
pasivna antena z različnimi prikljopi (glej stran 6)
pasivna antena sa različitim priključenjima (vidi stranicu 6)

** active antenna with built-in low noise amplifier (see page 12)
aktivna antena z vgrajenim nizkošumnim ojačevalnikom (glej stran 12)
aktivna antena sa ugrađenim niskošumnim pojačalom (vidi stranicu 12)

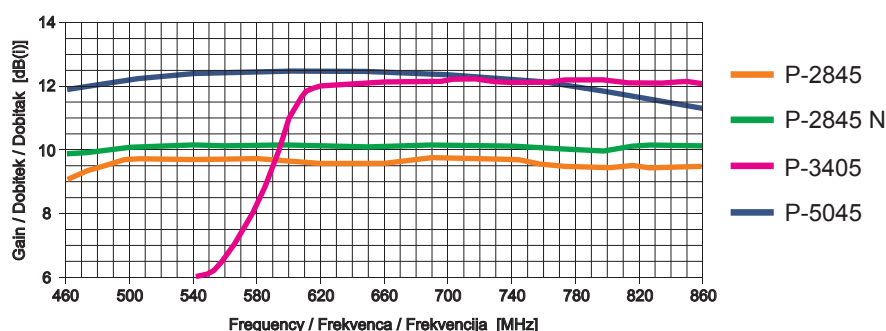

P-2845 DTT/G komplet

Antenna
antena
P-2845 DTT/G **

Coax. cable extension
koaks. podaljšek
koaks. produžetak
L=10 m

Power Supply
Napajalnik
Ispravljač
SUR-211

polybag with hanging carton
vrečka z obešanko
vrečka sa obešalnim kartonom